

KRAUSZ[®]

a **MUELLER** brand

HYMAX[®]

Wide Range Coupling
Solutions

**YOUR SAFEST
CHOICE FOR
COUPLING**



DETECT



MONITOR



CONTROL



REPAIR

MUELLER

HYMAX[®] PRODUCT INFORMATION

HYMAX Wide-Range Coupling

Lifting Handle

for easier lifting & sliding over the pipe.
Currently available in DN 40-300.

Center Ring

Grade P235 Steel.

Nuts & Bolts

1 top facing bolt on each side, for faster, easier and safer installation.
350mm - 1,500mm: 2 top facing bolts on each side.

Flip Gasket

flips easily in or out to accommodate larger DN.

Gasket Bridge

Type 316
Stainless Steel.

End Rings

Grade S235JR Steel.

Monoblock Design

Disassembly-free installation.

Coating


100% fusion bonded epoxy for enhanced corrosion protection.
Certified for GSK.

Two types of sealing:

Efficient mechanical sealing for low-pressure conditions and hydraulic inflatable gasket for enhanced sealing in pressurized conditions.
DN40-DN300: flipping gasket
DN350-DN1500: double layer detachable gasket.



SUITABLE FOR THESE PIPE MATERIALS:

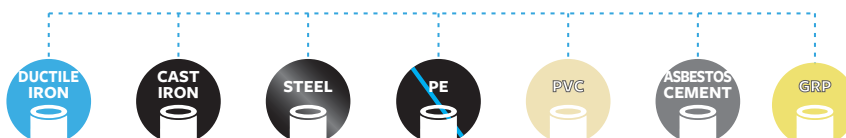

	Working Range (mm)	DN (mm)	Product Description	
Coupling Hymax 2 Hymax	Up to 32mm Up to 54mm	40-300 350-1300	Wide-range HYMAX Coupling, used for section replacement, connects two pipes of the same or different or same pipe diameters and materials.	
Flange Adaptor Hymax 2 Hymax Hymax	Up to 32mm Up to 54mm 54mm	40-300 350-600 650-1500*	Wide-range HYMAX Flange Adaptor connects any flanged device, such as valves, pumps and other devices, with a variety of pipe diameters and materials.	
* For various PN sizes contact your Krausz dealer				
Long Body Hymax 2 Hymax	Up to 32mm Up to 54mm	40-300 350-1500	Wide-range HYMAX Long Body Coupling, used for pipe section replacement, connects two pipes of the same or different or same pipe diameters and materials, covering a wider gap between the pipes.	
Reducer Hymax 2 Hymax Hymax	Up to 32mm Up to 54mm 54mm	40-300 350-600 650-1400*	Wide-range HYMAX Reducer joins pipes of different or same nominal sizes and materials.	
Threaded Outlet Hymax 2 Hymax	Up to 32mm Up to 54mm	50-300* 350-1500*	HYMAX Threaded Outlet provides effective outlet solutions for a wide variety of piping types and diameters, joining pipes made of the same or different materials.	
Flanged Outlet Hymax 2 Hymax	Up to 32mm Up to 54mm	50-300* 350-1500*	HYMAX Flanged Outlet provides effective outlet solutions for a wide variety of piping types and diameters, joining pipes made of the same or different materials.	

* MTO Sizes (Made To Order).


HYMAX[®] FAMILY FEATURES

Wide-Range Coupling Solutions.

Krausz HYMAX[®] coupling solutions feature advanced engineering and innovative design, enabling fast installation, outstanding flexibility, and extreme durability in varied conditions. These benefits make the Krausz HYMAX[®] the high-performance, cost-effective choice for a broad variety of applications. A revolutionary product line, that has set a new industry standard, the HYMAX products have been field-proven in millions of installations world-wide.

Fast and easy installation

- Advanced wide-range coupling with a patented flip gasket (in sizes 40-300mm) eliminates gasket removal mistakes and maximizes installer work efficiency.
- Lightweight construction enables fast and easy installation, with minimum manpower, reducing time in the ditch and improving worker safety.
- Unique top-facing bolts enable easy installation access.
- Ready-to-use, stab-on design eliminates the need for extensive under-pipe digging and work.
- Installation by stabbing, eliminates the need for product disassembly before use.

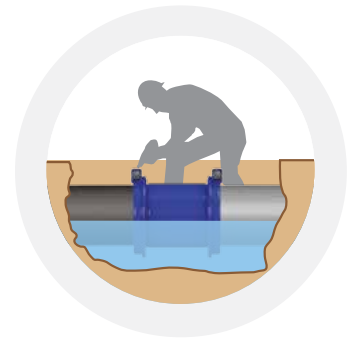


Multiple applications

- Broad variety of products, from couplings to flange adaptors and reducers.
- Extensive portfolio of products with 40mm-1500mm nominal pipe size.
- All products work with a variety of pipe materials: ductile iron, cast iron, steel, PE, PVC, AC, and GRP.
- One single product can connect pipes of two different materials, allowing nominal diameter range of up to 54mm.



Flexible connection

- Efficient mechanical sealing for low-pressure conditions and hydraulic inflatable gasket for enhanced sealing in pressurized conditions.
- During installation, allows for up to 4° angular deflection on each end, as well as for misaligned pipes.
- Absorbs post-installation dynamic pipe deflection of up to 4° on each end, reducing the risk of damage and cracking due to ground shifts and temperature changes.
- Adapts to out-of-round pipe shape (up to 13mm), for optimum fit on both ends.

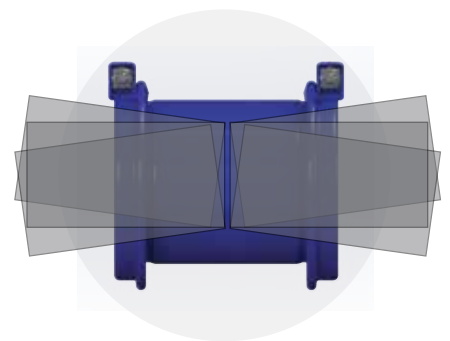


High durability

- Patented sealing solution is the pressure-assisted gasket featuring two-stage sealing: mechanical sealing that is effective under vacuum or non-pressure, and self-inflating gasket using water pressure.
- Fusion-bonded epoxy coating enables an insulated product and prevents corrosion.
- Nuts, bolts and other components are made of stainless steel.
- Innovative radial closing design and sealing systems eliminate installation errors.
- Unique MAG treatment prevents galling and enables repeated bolt tightening; it also eliminates the need for grease, preventing dust and dirt build-up.



Cost-saving

- Hymax products suit a wide range of pipe diameters, replacing the need to use dedicated products and thus reducing inventory costs and saving shelf space.
- Fast and easy installation saves time and money.

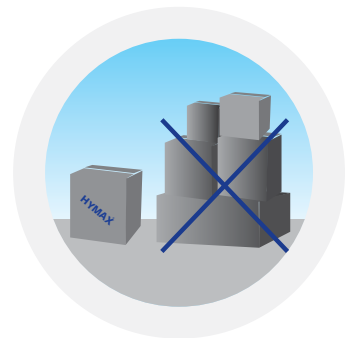

HYMAX[®] Product Information

Products meet standards NSF-61, NSF-372, EN 14525 AND BRL 775

All products meet or exceed standards NSF-61 and NSF-372. Products up to DN300 were approved by 3rd party ILAC lab according to EN 14525.

Body:

- 40mm - 300mm: Grade P235 Steel, EN 10217-1
- 350mm - 1500mm: Grade S235JR Steel, EN 10025-2 (DIN 17100)

Center Ring:

- 40mm - 300mm: Grade P235 Steel, EN 10217-1.
- 350mm - 1500mm: Grade S235JR Steel, EN 10025-2 (DIN 17100).

End Rings:

- 40mm - 1500mm: Grade S235JR Steel, EN 10025-2 (DIN 17100).
- 350mm - 400mm: Grade S235JR Steel, EN 10025-2 (DIN 17100).
(or Ductile Iron Casting ASTM A536 Grade 65-45-12).

Two types of sealing

- Efficient mechanical sealing for low-pressure conditions and hydraulic inflatable gasket for enhanced sealing in pressurized conditions.
- DN 40mm - 300mm: flipping gasket
- DN 350mm - 1,500mm: double layer detachable gasket

Gasket:

- EPDM compounded for water and sewerage, meets international standards for contact with drinking water: NSF-61, NSF-372, UBA Elastomer Guideline (KTW), W270, XP P 41-250, AS/NZS 4020, and BS 6920. Meets DIN EN 681-1 for water and drainage applications.

Nuts & Bolts:

- AISI 316 Stainless Steel. Rolled thread and MAG treatment.
- Top facing bolts for maximum installer safety.

Gasket Bridge:

- AISI 316 Stainless Steel.

Coating:

- 100% fusion bonded epoxy for enhanced corrosion protection. Minimum thickness 250 microns. Meets NSF-61, NSF-372, BRL-K759, BS 6920, W270, ONORM B 5014-1, XP P 41-250, AS/NZS 4020, UBA-Coatings Guideline and GSK.

Dynamic Deflection:

- Up to 4° per side (one side only for Flange Adaptor).

PFA - Allowable Operating Pressure:

- Up to 16 Bar.

PEA - Allowable Test Pressure:


- Up to 24 Bar.

Working Temperature:

- -30°C up to +50°C.

Vacuum Test:

- 0.8 Bar.



350mm - 1,500mm


Two-layer detachable Gasket
allows adjusting to pipe diameter



40mm - 300mm

Flip gasket

* Data may vary according to product size and type. For complete technical information please refer to product specification sheet.

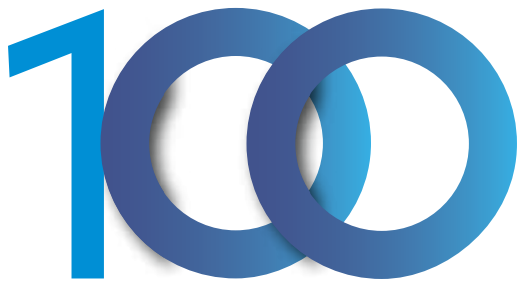

YEARS

OF INNOVATIVE PIPE JOIN AND REPAIR SOLUTIONS

Krausz Industries develops, designs, and manufactures market-leading smart products for repairing and connecting different types of pipes for potable water and sewage.

During more than 100 years of industry leadership, Krausz has earned a solid reputation for innovative, high-quality products that are exceptionally easy to use and are extremely durable; products that save significant time and cost in installation, inventory and maintenance.

With millions of installations worldwide, Krausz products expertly meet immediate connection and repair needs and prevent future pipe damage, delivering long-lasting value.

In 2018, Krausz was acquired by Mueller Water Products.

Mueller Water Products, Inc. (NYSE: MWA) is a leading manufacturer and marketer of products and services used in the transmission, distribution and measurement of water in North America. Mueller's broad product and service portfolio includes engineered valves, fire hydrants, pipe connection and repair products, metering products, leak detection, and pipe condition assessment.

Discover the Right Coupling for
your Repair and Installation Needs.
Scan the QR Code to Get Started



*For more information about us, or to view our full line of products, please visit www.krausz.com
or call Customer Service at Tel: +972 (0)3 5154000 Fax: +972 (0)3 5183293 Info@krausz.com. 1 Harav Mantzura Str. Rosh Haayin, Israel 4850001*

Mueller refers to one or more of Mueller Water Products, Inc. a Delaware corporation ("MWP"), and its subsidiaries. MWP and each of its subsidiaries are legally separate and independent entities when providing products and services. MWP does not provide products or services to third parties. MWP and each of its subsidiaries are liable only for their own acts and omissions and not those of each other. MWP brands include Mueller®, Echologics®, Hydro Gate®, Hydro-Guard®, HYMAX®, i2O®, Jones®, Krausz®, Mi.Net®, Milliken®, Pratt®, Pratt Industrial®, Sentryx™, Singer®, and U.S. Pipe Valve & Hydrant. Please see muellerwp.com/brands and www.krausz.com to learn more.

© 2024 Mueller International Holdings. All Rights Reserved. The trademarks, logos and service marks displayed in this document are the property of Mueller, its affiliates or other third parties. Products above marked with a section symbol (§) are subject to patents or patent applications. For details, visit www.mwppat.com. These products are intended for use in potable water applications. Please contact your Mueller Sales or Customer Service Representative concerning any other application(s).

BR0036 REV 3/24

