



40mm - 300mm: Flip gasket
350mm - 1,500mm: Detachable gasket

HYMAX® FLANGE ADAPTOR¹ (40mm-1500mm)

FEATURES

- USING THE GAME-CHANGING HYMAX TECHNOLOGY, PROVEN IN MILLIONS OF INSTALLATIONS WORLDWIDE
- SUITABLE FOR ALL TYPES OF PIPES - DUCTILE IRON, CAST IRON, STEEL, PE, PVC, AC, GRP
- PATENTED PROGRESSIVE PRESSURE-ASSISTED GASKET WITH 2-STAGE SEALING
- LIGHTWEIGHT CONSTRUCTION ENABLES FAST AND EASY INSTALLATION
- ALLOWS 4° DYNAMIC DEFLECTION, REDUCING FUTURE PIPE DAMAGE

SPECIFICATIONS²

STANDARDS³

ALL PRODUCTS MEET OR EXCEED STANDARDS NSF-61 AND NSF-372.
PRODUCTS UP TO DN300 WERE APPROVED BY 3RD PARTY ILAC LAB ACCORDING TO EN 14525.

SIZE

AVAILABLE IN NOMINAL DIAMETER SIZES 40mm – 600mm (STANDARD).
650mm – 1500mm are MTO (MADE TO ORDER). CONTACT KRAUSZ DISTRIBUTOR FOR DETAILS.

MATERIALS

END RINGS

40mm – 300mm: S235JR GRADE STEEL, IN ACCORDANCE WITH EN 10025-2 (DIN 17100).
350mm – 400mm: S235JR GRADE STEEL, IN ACCORDANCE WITH EN 10025-2 (DIN 17100)
(OR DUCTILE IRON CASTING ASTM A536 GRADE 65-45-12).
450mm – 1500mm: S235JR GRADE STEEL, IN ACCORDANCE WITH EN 10025-2 (DIN 17100).

FLANGED BODY

40mm – 300mm: P235 GRADE STEEL, IN ACCORDANCE WITH EN 10217-1.
350mm – 1500mm: S235JR GRADE STEEL, IN ACCORDANCE WITH EN 10025-2 (DIN 17100).

FLANGE

PN-10/16: 175mm – 600mm³
PN-16: 40mm – 1500mm⁴
PN-10: 40mm – 1500mm⁴
BSTD: 50mm – 1500mm

GASKET

EPDM COMPOUNDED FOR WATER AND SEWERAGE. MEETS INTERNATIONAL STANDARDS FOR CONTACT WITH DRINKING WATER: NSF-61, NSF-372, KTW-UBA Elastomer guideline, W270, XP P 41-250, AS/NZS 4020, AND BS 6920. MEETS DIN EN 681-1 FOR WATER AND DRAINAGE APPLICATIONS.

BRIDGE

AISI 304/316 STAINLESS STEEL.⁴

SPHERICAL SPACERS

AISI 304L/316 STAINLESS STEEL.⁴

COATING

100% FUSION BONDED EPOXY FOR ENHANCED CORROSION PROTECTION. MINIMUM THICKNESS 250 MICRON. MEETS NSF-61, NSF-372, BRL-K759, BS 6920, W270, ONORM B 5014-1, XP P 41-250, AS/NZS 4020, UBA-COATINGS GUIDELINE, AND GSK.

NUTS AND BOLTS

AISI 304/316 STAINLESS STEEL. ROLLED THREAD AND ANTI-GALLING COATING.

¹ The product is protected by various patents registered in various countries.

² For details about Made to Order (MTO) products please contact your KRAUSZ distributor.

³ For the updated status of the product standards, please contact your local KRAUSZ representative.

⁴ Sizes DN40-DN300 available in AISI 316 stainless steel.

PRODUCT PERFORMANCE

WORKING TEMPERATURE

EPDM GASKET

CONTINUOUS OPERATION | -30°C UP TO +85°C

SHORT TIME OPERATION | UP TO +100°C

EPOXY COATING

ABOVE GROUND APPLICATIONS | UP TO +50°C

BELOW GROUND APPLICATIONS | UP TO +65°C

DYNAMIC DEFLECTION

UP TO 4°

MIN. PIPE INSERTION

40mm – 300mm

55mm

350mm – 1500mm

100mm

MAX. PIPE INSERTION

40mm – 300mm

80mm

350mm – 1500mm

150mm

MAXIMUM OFFSET
FOR MISALIGNED PIPES

40mm – 80mm

5mm

100mm – 1500mm

6mm

MAXIMUM OUT OF
ROUNDNESS

40mm

2mm

50mm – 80mm

5mm

100mm – 300mm

8mm

350mm – 1500mm

13mm

WORKING PRESSURE

FLANGE PN-10/16		FLANGE PN-16		FLANGE PN-10		BSTD	
200mm - 600mm	16 BAR	40mm - 600mm	16 BAR	40mm - 1350mm	10 BAR	50mm - 600mm	12.5 BAR
		650mm - 1000mm	12 BAR	1350mm - 1500mm	8 BAR	650mm - 1000mm	12 BAR
		1000mm - 1350mm	10 BAR			1000mm - 1350mm	10 BAR
		1350mm - 1500mm	8 BAR			1350mm - 1500mm	8 BAR

RATED PRESSURE


1.5 X WORKING PRESSURE

VACUUM TEST

0.8 BAR

PRODUCT TABLES

HYMAX FLANGE ADAPTOR 40-300

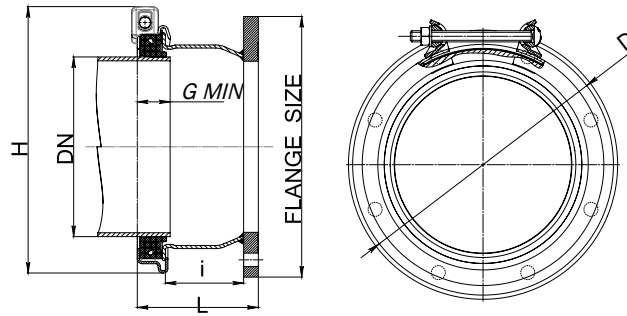

HYMAX FLANGE ADAPTOR PN-10 NOMINAL SIZES 200-300mm (*)

X=6 -> 304 STAINLESS STEEL


X=7 -> 316 STAINLESS STEEL

Krausz Part Number	DN (mm)	Flange PN-10 (mm)	Overall Range (mm)	Before Removal of Inner Layer (mm)	After Removal of Inner Layer (mm)	D (mm)	H (mm)	i (mm)	L (mm)	Bolts Qty. -Size	Torque (Nm)	Approx. Weight (kg)
871-82X-08019010	175	200	190-222	190-206	205-222	298	325	101	160	1-M14	80	15.3
871-82X-08021710	200	200	217-250	217-233	232-250	328	355	101	161	1-M14	80	15.8
871-82X-10027210	250	250	272-305	272-289	288-305	382	408	101	163	1-M14	100	16.5
871-82X-10027810	250 o.s.	250	278-311	278-295	294-311	388	415	101	163	1-M14	100	16.6
871-82X-12031510	300	300	315-347	315-331	330-347	422	445	101	165	1-M14	110	18.8
871-82X-12033410	300 o.s.	300	334-366	334-350	349-366	440	465	101	165	1-M14	110	19.3
871-82X-14033410	300 o.s.	350	334-366	334-350	349-366	440	465	101	165	1-M14	110	35.0

* For sizes 40mm - 175mm, PN-10 and PN-16 have identical flange patterns. See p. 4 for product data.

* Detachable gasket

HYMAX FLANGE ADAPTOR 350-600

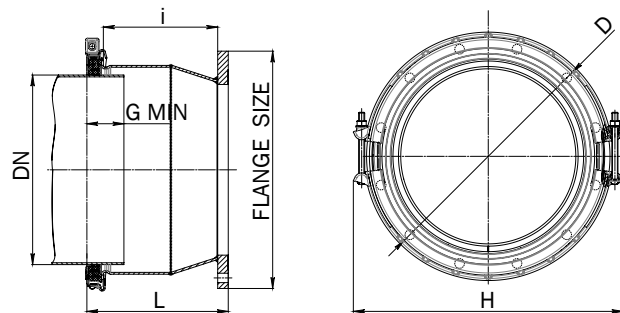

HYMAX FLANGE ADAPTOR PN-10 NOMINAL SIZES 350-600mm

Krausz Part Number	DN (mm)	Flange PN-10 (mm)	Overall Range (mm)	Before Removal of Inner Layer (mm)	After Removal of Inner Layer (mm)	D (mm)	H (mm)	i (mm)	L (mm)	Bolts Qty. -Size	Torque (Nm)	Approx. Weight (kg)
871-825-14037510	350	350	375-431	375-405	403-431	534	600	307	387	2-M16	200	50.8
871-825-14037810	350	350	378-434	378-408	406-434	534	600	307	387	2-M16	200	50.8
871-825-16043410	400	400	434-488	434-462	460-488	588	655	307	389	2-M16	200	59.5
871-825-18048810	450	450	488-542	488-516	514-542	642	705	307	392	2-M16	200	72.7
871-825-20054010	500	500	540-594	540-568	566-594	694	760	307	395	2-M16	200	82.0
871-825-24060610	600	600	606-660	606-634	632-660	760	825	307	399	2-M16	200	96.5
871-825-24062410	600 o.s.	600	624-678	624-652	650-678	778	845	307	399	2-M16	200	102.0

* Detachable gasket

PRODUCT TABLES

HYMAX2 FLANGE ADAPTOR PN-16 NOMINAL SIZES 40-300mm (*)

X=6 -> 304 STAINLESS STEEL

X=7 -> 316 STAINLESS STEEL

Krausz Part Number	DN (mm)	Flange PN-16 (mm)	Overall Range (mm)	Range in Closed Gasket Position (mm)	Range in Open Gasket Position (mm)	D (mm)	H (mm)	i (mm)	L (mm)	Bolts Qty. -Size	Torque (Nm)	Approx. Weight (kg)
879-82X-01004116	40	40	41-54	41-50.5	50-54	100	130	103	150	1 -M12	45	3.5
879-82X-02005416	50	50	54-77	54-66	65-77	133	165	95	149	1 -M12	70	4.5
879-82X-03008816	80	80	88-108	88-99	98-108	170	200	73	129	1 -M12	70	5.4
879-82X-03010816	100	80	108-143	108-126	125-143	220	250	158	214	1 -M14	80	8.4
879-82X-04010816	100	100	108-143	108-126	125-143	220	250	73	130	1 -M14	80	8.2
879-82X-05013016	125	125	130-162	130-146	145-162	240	270	101	159	1 -M14	80	9.7
879-82X-06013016	125	150	130-162	130-146	145-162	240	270	101	159	1 -M14	80	10.8
879-82X-06015816	150	150	158-190	158-174	173-190	270	295	101	161	1 -M14	80	11.2
879-82X-06016316	150 o.s.	150	163-195	163-179	178-195	273	298	101	161	1 -M14	80	11.2
879-82X-07019016	175	175	190-222	190-206	205-222	298	325	101	161	1 -M14	80	13.2
879-82X-08019016	175	200	190-222	190-206	205-222	298	325	101	163	1 -M14	80	14.0
879-82X-08021716	200	200	217-250	217-233	232-250	328	355	101	163	1 -M14	80	14.5
879-82X-10027216	250	250	272-305	272-289	288-305	382	408	101	165	1 -M14	100	18.3
879-82X-10027816	250 o.s.	250	278-311	278-295	294-311	388	415	101	165	1 -M14	100	18.4
879-82X-12031516	300	300	315-347	315-331	330-347	422	445	101	169	1 -M14	110	20.8

* Flip gasket

HYMAX FLANGE ADAPTOR PN-16 NOMINAL SIZES 350-600mm (*)

Krausz Part Number	DN (mm)	Flange PN-16 (mm)	Overall Range (mm)	Before Removal of Inner Layer (mm)	After Removal of Inner Layer (mm)	D (mm)	H (mm)	i (mm)	L (mm)	Bolts Qty. -Size	Torque (Nm)	Approx. Weight (kg)
879-825-14037516	350	350	375-431	375-405	403-431	534	600	307	392	2 -M16	200	57.3
879-825-14037816	350	350	378-434	378-408	406-434	534	600	307	392	2 -M16	200	57.3
879-825-16043416	400	400	434-488	434-462	460-488	588	655	307	395	2 -M16	200	68.0
879-825-18048816	450	450	488-542	488-516	514-542	642	705	307	399	2 -M16	200	86.2
879-825-20054016	500	500	540-594	540-568	566-594	694	760	307	403	2 -M16	200	106.0
879-825-24060616	600	600	606-660	606-634	632-660	760	825	307	409	2 -M16	200	138.0
879-825-24062416	600 o.s.	600	624-678	624-652	650-678	778	845	307	409	2 -M16	200	143.5

* See drawing on p. 3

* Detachable gasket

HYMAX FLANGE ADAPTOR PN-10/16 NOMINAL SIZES 175-300mm (*)

X=6 -> 304 STAINLESS STEEL

X=7 -> 316 STAINLESS STEEL

Krausz Part Number	DN (mm)	Flange PN-16 (mm)	Overall Range (mm)	Before Removal of Inner Layer (mm)	After Removal of Inner Layer (mm)	D (mm)	H (mm)	i (mm)	L (mm)	Bolts Qty. -Size	Torque (Nm)	Approx. Weight (kg)
878-82X-08019016	175	200	190-222	190-206	205-222	298	325	101	163	1-M14	80	14
878-82X-08021716	200	200	217-250	217-233	232-250	328	355	101	163	1-M14	80	15
878-82X-10027216	250	250	272-305	272-289	288-305	382	408	101	165	1-M14	80	21.5
878-82X-12031516	300	300	315-347	315-331	330-347	422	445	101	169	1-M14	80	24.1

* See drawing on p. 3

* Detachable gasket

PRODUCT TABLES

HYMAX FLANGE ADAPTOR PN-10/16 NOMINAL SIZES 350-600mm (*)

Krausz Part Number	DN (mm)	Flange PN-16 (mm)	Overall Range (mm)	Before Removal of Inner Layer (mm)	After Removal of Inner Layer (mm)	D (mm)	H (mm)	i (mm)	L (mm)	Bolts Qty. -Size	Torque (Nm)	Approx. Weight (kg)
878-825-14037016	350	350	370-424	370-398	396-424	520	573	307	390	2-M16	200	51.5
878-825-16042016	400	400	420-474	420-448	446-474	580	640	307	390	2-M16	200	64
878-825-16044416	400	400	444-498	444-472	470-498	600	660	332	415	2-M16	200	66.5
878-825-20047016	450	500	470-524	470-498	496-524	625	685	206	295	2-M16	200	74.5
	500											
878-825-20052016	500	500	520-574	520-548	546-574	675	735	307	400	2-M16	200	86.5
	550											
878-825-24057216	500	600	572-626	572-600	598-626	725	785	206	300	2-M16	200	96
	550											
878-825-24062416	600 o.s	600	624-678	624-652	650-678	778	845	307	405	2-M16	200	141.5

* See drawing on p. 3

* Detachable gasket

X=6 -> 304 STAINLESS STEEL

X=7 -> 316 STAINLESS STEEL

HYMAX FLANGE ADAPTOR BSTD NOMINAL SIZES 50-300mm (*)

Krausz Part Number	DN (mm)	Flange PN-16 (mm)	Overall Range (mm)	Before Removal of Inner Layer (mm)	After Removal of Inner Layer (mm)	D (mm)	H (mm)	i (mm)	L (mm)	Bolts Qty. -Size	Torque (Nm)	Approx. Weight (kg)
870-82X-02005412	50	50	54-77	54-66	65-77	133	165	95	146	1-M12	60	3.7
870-82X-03008812	80	80	88-108	88-99	98-108	170	200	73	126	1-M12	60	4.6
870-82X-04010812	100	100	108-143	108-126	125-143	220	250	73	130	1-M14	80	6.9
870-82X-06013012	125	150	130-162	130-146	145-162	240	270	101	155	1-M14	80	9.3
870-82X-06015812	150	150	158-190	158-174	173-190	270	295	101	155	1-M14	80	10.5
870-82X-06016312	150 o.s	150	163-195	163-179	178-195	273	298	101	155	1-M14	80	10.5
870-82X-08019012	175	200	190-222	190-206	205-222	298	325	101	155	1-M14	80	12.7
870-82X-08021712	200	200	217-250	217-233	232-250	328	355	101	155	1-M14	80	13.2
870-82X-10027212	250	250	272-305	272-289	288-305	382	408	101	155	1-M14	80	17.1
870-82X-10027812	250 o.s	250	278-311	278-295	294-311	388	415	101	155	1-M14	80	17.2
870-82X-12027212	250	300	272-305	272-289	288-305	382	408	103	162	1-M14	80	21
870-82X-12031512	300	300	315-347	315-331	330-347	422	445	101	160	1-M14	80	21.5
870-82X-12033412	300 o.s	300	334-366	334-350	349-366	440	465	101	160	1-M14	80	21.6

* See drawing on p. 3

* Detachable gasket

HYMAX FLANGE ADAPTOR BSTD NOMINAL SIZES 350-600mm (*)

Krausz Part Number	DN (mm)	Flange PN-16 (mm)	Overall Range (mm)	Before Removal of Inner Layer (mm)	After Removal of Inner Layer (mm)	D (mm)	H (mm)	i (mm)	L (mm)	Bolts Qty. -Size	Torque (Nm)	Approx. Weight (kg)
870-825-14037812	350	350	378-434	378-408	406-434	534	600	307	380	2-M16	200	53.4
870-825-16043412	400	400	434-488	434-462	460-488	588	655	307	380	2-M16	200	59.7
870-825-18048812	450	450	488-542	488-516	514-542	642	705	307	385	2-M16	200	71
870-825-20054012	500	500	540-594	540-568	566-594	694	760	307	390	2-M16	200	83.3
870-825-24060612	600	600	606-660	606-634	632-660	760	825	307	395	2-M16	200	106
870-825-24062412	600 o.s	600	624-678	624-652	650-678	778	845	307	395	2-M16	200	107

* See drawing on p. 3

* Detachable gasket

Discover the Right Coupling for
your Repair and Installation Needs.
Scan the QR Code to Get Started



For more information about us, or to view our full line of products, please visit www.krausz.com

or call Customer Service at Tel: +972 (0)3 5154000 Fax: +972 (0)3 5183293 infokrausz@muellerwp.com. 1 Harav Mantzura Str. Rosh Haayin, Israel 4850001

Mueller refers to one or more of Mueller Water Products, Inc. a Delaware corporation ("MWP"), and its subsidiaries. MWP and each of its subsidiaries are legally separate and independent entities when providing products and services. MWP does not provide products or services to third parties. MWP and each of its subsidiaries are liable only for their own acts and omissions and not those of each other. MWP brands include Mueller®, Echologics®, Hydro Gate®, Hydro-Guard®, HYMAX®, i2O®, Jones®, Krausz®, Mi.Net®, Milliken®, Pratt®, Pratt Industrial®, Sentryx™, Singer®, and U.S. Pipe Valve & Hydrant. Please see muellerwp.com/brands and krausz.com to learn more.

© 2024 Mueller Co., LLC. All Rights Reserved. The trademarks, logos and service marks displayed in this document are the property of Mueller Co., LLC, its affiliates or other third parties. Products above marked with a section symbol (§) are subject to patents or patent applications. For details, visit www.mwppat.com. These products are intended for use in potable water applications. Please contact your HYMAX Sales or Customer Service Representative concerning any other application(s).

PS0028 REV 10/2024

